


UNIT VENTILATOR

CLASSROOM UNIT VENTILATOR... QUIET COMFORT BY DESIGN™

- AMCA Performance - Direct Drive - Centrifugal Fan Blower.
- 24VAC/0-10VDC/PWM - Electronically Commuted Motor.
- 3/4" Ball valve. Minimum 300 PSIG, Armaflex Insulation.
- 24VAC/0-10VDC - Actuator /2 or 3 Way valve body.
- Close OFF pressure 60 PSIG. Minimum 300 PSIG.
- Freeze Stat 15F to 55F , 2 SPST (1NO, 1NC) 20 Ft Capillary.
- 1/2" Cu. Heating Coil, 0.1" Al. Max pressure 300 PSIG.
- 20x20x2- MERV 13 - Green Pleat – Filter.
- Oversize control box for Field controller mounting. Controls furnished by controls contractor.
- Low Leak - 21x16, Parallel Blade - Factory installed Damper. Complete assembly can be removed for maintenance.
- Modulating Actuator 2-10 VDC for Field connection wired into control box.
- 2` - 16 Gauge Painted Panels with Type 300, 2`thick Insulation.
- Hinged door and Electric Box for ease of Maintenance.
- Foot Print 26`x 28` Height 92`

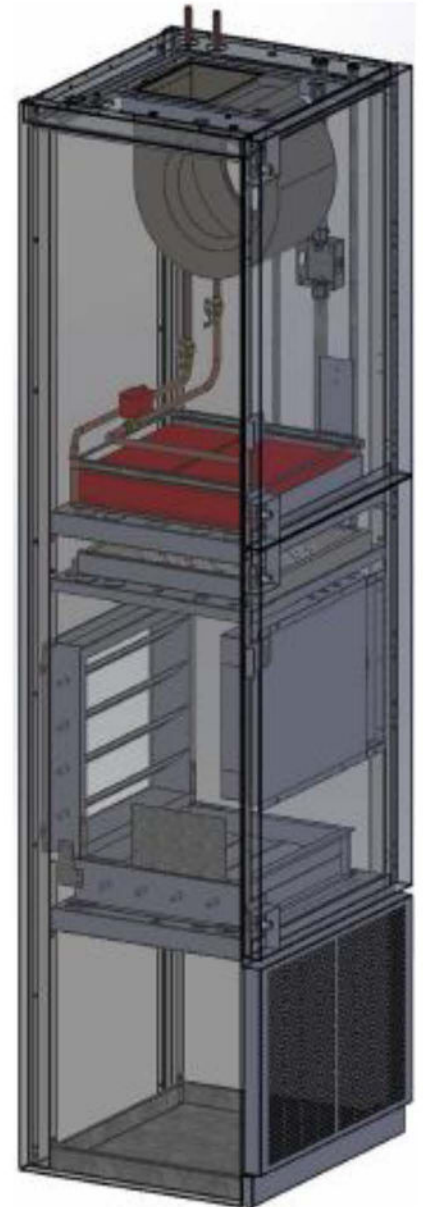

FOR MORE INFORMATION PLEASE CONTACT US
161 MILANI BLVD. || VAUGHAN, ONTARIO
P: 905.660.0700 || E: INFO@CLIMETEC.CA

Copyright 2018 Climetec™ - Patents Pending